Anleitung Plex Plate 6700 Anschluss

1. Rechteckigen Ausschnitt mit den Abmaßen 18 x11cm auf dem Schrank markieren.
2. Die Ecken mit einem Bohrer Ø 10mm vorbohren und dann mit Handstichsäge aussägen.

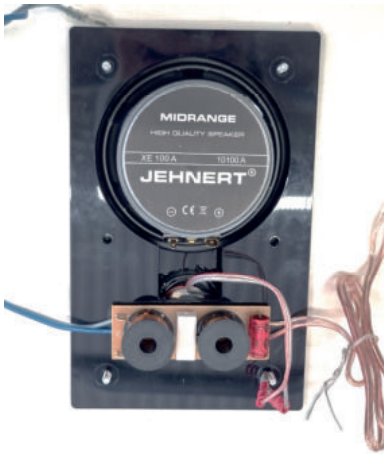

3. Plex-Plate Gehäuse mit Lautsprechern muss in die rechteckige Aussparung passen, die Akustik-stoffblende muss außen anliegen, sodass die Aussparung verdeckt ist.
4. Die Rückseite mit Frequenzweiche von hinten drauf stecken, Unterlagsscheiben auf die 4 langen Schrauben stecken und mit 4x Polystopmuttern M4 festziehen.

5. Hinweis: Markiertes Kabel bei IN Minus –
6. Frequenzweichenkabel am Mitteltöner anschließen
7. Hochtönerkabel an Frequenzweiche anschließen

Wenn Schrauben zu lang sind, Schrauben kürzen!

Instruction Plex-Plate 6700 Connection

1. mark rectangular cutout with dimensions 18 x11cm on the cabinet.
2. Pre-drill the corners with a Ø 10mm diameter drill bit and then saw them out with a hand jigsaw.

3. Plex-Plate housing with speakers must fit into the rectangular recess, the acoustic fabric panel must be on the outside, so that the recess is covered.
4. Place the rear panel with the crossover on top from behind, place washers on the 4 long screws and tighten with 4x M4 polystyrene nuts.

5. note: marked cable at IN minus -.
6. connect crossover cable to midrange driver
7. connect tweeter cable to crossover

If screws are too long, shorten screws!